




Ventamatic[®] Power Vents

- Rugged and efficient domes
- Motors built to last
- Adjustable thermostats
- Proven and reliable construction

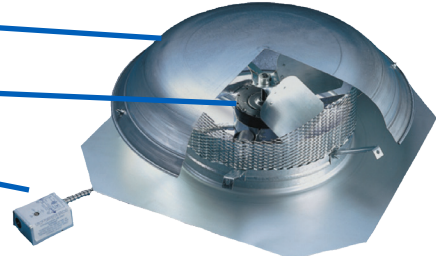

Our low profile domes—available in Duradome[®] Spun Aluminum or Galvanized Steel—have galvanized steel mesh grilles to protect against insects, birds, and rodents yet allow adequate air intake. Our fan blades are precision balanced for minimum vibration. Our motors are UL and CU/L listed for safety in handling. Ventamatic[®] Power Roof Vents are factory assembled for easy installation (no special tools required) and are built for stability and high wind resistance.

**OUR
BEST!**

VXNRG (1400 CFM) • 2.1 Amp Energy Efficient PSC Motor

2000 sq ft attic • Limited Lifetime Warranty

VXNRGAA Series

Duradome[®] Spun Aluminum
(mill, brown, black, w. grey)
Aluminum venturi construction

VXNRGAM Series

Galvanized Steel Dome
(mill, brown, black, w. grey)
Galvanized steel venturi construction



Mill

VXSVR (1600 CFM) • 5.1 Amp PSC Motor • 2400 sq ft attic


5-Year Limited Warranty

VXSVRAA Series

Duradome[®] Spun Aluminum
(mill, brown, black, w. grey)
Aluminum venturi construction

VXSVRAM Series

Galvanized Steel Dome
(mill, brown, black, w. grey)
Galvanized steel venturi construction

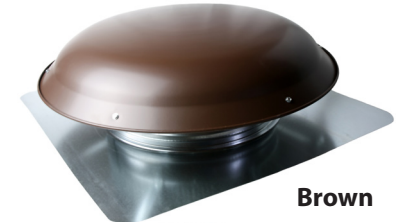

Brown

VXVIP SERIES (1400 CFM) • 4.5 Amp Motor • 2000 sq ft attic

2-Year Limited Warranty

VXVIPAA Series

Duradome[®] Spun Aluminum
(mill, brown, black, w. grey)
Aluminum venturi construction

VXVIPAM Series

Galvanized Steel Dome
(mill, brown, black, w. grey)
Galvanized steel venturi construction



Black

VX2414 SERIES (1200 CFM) • 3.4 Amp Motor • 1700 sq ft attic


2-Year Limited Warranty

VX2414 AA Series

Duradome[®] Spun Aluminum
(mill, brown, black, w. grey)
Aluminum venturi construction

VX2414 AM Series

Galvanized Steel Dome
(mill, brown, black, w. grey)
Galvanized steel venturi construction

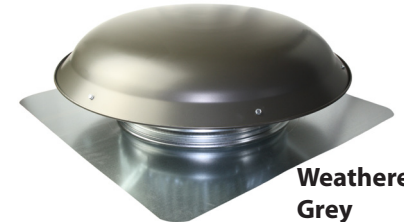

Weathered Grey

VX1000 SERIES (1080 CFM) • 2.6 Amp Motor • 1600 sq ft attic

600 sq in NFA • 2-Year Limited Warranty

VX1000 AM Series

Galvanized Steel Dome
(mill, brown, black, w. grey)
Galvanized steel venturi construction



Galvanized Mill

Ventamatic[®] Power Vents require a MINIMUM 600 sq inches NFA of intake ventilation. Inadequate intake ventilation will lead to motor failure.