


Conduit & cable




Flex-Rite™ Cable/Conduit To Wire Fasteners

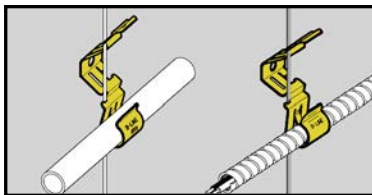

- Can be used in place of batwings.
- Will not bend or deform hanger wire.
- Attaches to #12 - #8 wire and 1/4" plain rod.
- Accommodates MC, AC, 3/8" FMC or 1/2" EMT.
- Cable can be installed before or after attachment to wire.
- Static Load Capacity:
BX-8 - 20 Lbs.
BX-18 - 30 Lbs.

| UPC/Part Number | Catalog Number | Cable/Conduit Size | Box Qty. |
|-----------------|----------------|------------------------------|----------|
| 78101101402 | BX-8 | .375" to 706" O.D. | 100 |
| 78101102943 | BX-18 | .706" to 1.380" O.D. | 100 |
| 78101101685 | BX-8B | Bulk Packed In Fiber Barrels | 4000 |

Conduit & Cable

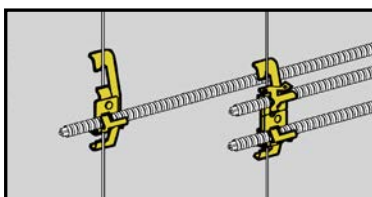

Cable To Rod Fasteners



BX4-W2

BX4M-W2

- Assemblies support MC, AC, sizes 14/2 through 10/3 or 3/8 FMC.
- W2 series attaches to 1/8" thru 3/8" flanges or #12 wire thru 1/4" plain or threaded rod.
- W6 series attaches to 3/8" thru 7/16" flanges or 3/8" plain or threaded rod.

| UPC/Part Number | Catalog Number | Description | Box Qty. |
|-----------------|----------------|-------------|----------|
| 78101101219 | BX4-W2 | Single Runs | 100 |
| 78101101189 | BX4M-W2 | Double Runs | 100 |
| 78101195517 | BX4-W6 | Single Runs | 100 |
| 78101195518 | BX4M-W6 | Double Runs | 100 |

Read safety/installation instruction sheets in packages before use.