


ELECTRIC BASEBOARD

Sensible, quiet heat starts here

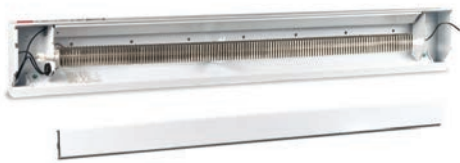

- Practical design is ideal for new construction and built to last
- Easy installation with pre-punched knockouts at 1-inch intervals
- Universal wiring available at either end
- Proven construction helps maximize surface area and funnel heated air
- Place under a window for best results
- Includes high-temperature safety shutoff feature
- Powder coated for a smooth, durable finish
- Lifetime warranty

Take the chill out of any room with our most popular baseboard heater. Enjoy the simple warmth of reliable, quiet convection heat. All our Cadet baseboards are designed for easy installation and will keep you warm for years to come.

ARCHITECTURAL - ENGINEERING INFORMATION

Electric baseboard heaters are UL listed, factory rated at 120V, 208V, and dual rated from 208V to 240V. Element is steel sheathed calrod element with channel shaped aluminum fins. A full length capillary sensor tube is an integral part of each unit. Case, cover, and deflector are made of 24 gauge steel with 20 gauge junction boxes containing a grounding screw. All metal pieces are finished with a powder coat paint system.

TECHNICAL INFORMATION

Baseboard heaters work best when placed under a window and at least 12 inches away from furniture or other objects. Keep at least 12 inches minimum from objects hanging above (i.e., drapes). Do not install below electrical outlets. The electric baseboard heater may be placed directly on the floor and mounted to the wall. An optional Cadet MTX mounting tool is helpful for installing the heater. Originally designed for mounting baseboard heaters, its applications are unlimited.

All models require hard-wire installation (no cord or plug).

CADET 
INVITING WARMTH

cadetheat.com
855.CADET.US
Vancouver, Washington



ELECTRIC BASEBOARD

Dimensions: 6-3/4" H x 2-1/2" D x Various lengths
All models require a thermostat. Accessories below.

| WHITE PART | ALMOND PART | MODEL* | DESCRIPTION | WATTS | VOLTS | AMPS | BTUS | WT/LBS |
|------------|-------------|----------|---------------|------------------------|------------|---------------------|------------------------|--------|
| 05530 | 05520 | 2F500-1 | 30" baseboard | 500 | 120 | 4.2 | 1710 | 6 |
| 05532 | 05522 | 3F750-1 | 36" baseboard | 750 | 120 | 6.3 | 2560 | 7 |
| 05534 | 05524 | 4F1000-1 | 48" baseboard | 1000 | 120 | 8.3 | 3415 | 9 |
| 05536 | 05526 | 6F1500-1 | 72" baseboard | 1500 | 120 | 12.5 | 5120 | 12 |
| 11924 | 11918 | 2F500-8 | 30" baseboard | 500 | 208 | 2.4 | 1710 | 6 |
| 11934 | 11938 | 3F750-8 | 36" baseboard | 750 | 208 | 3.6 | 2560 | 7 |
| 11944 | 11948 | 4F1000-8 | 48" baseboard | 1000 | 208 | 4.8 | 3415 | 9 |
| 11954 | 11958 | 5F1250-8 | 60" baseboard | 1250 | 208 | 6.0 | 4265 | 10 |
| 11964 | 11968 | 6F1500-8 | 72" baseboard | 1500 | 208 | 7.2 | 5120 | 12 |
| 11984 | 11988 | 8F2000-8 | 96" baseboard | 2000 | 208 | 9.6 | 6825 | 16 |
| 10924 | 11990 | 8F2500-8 | 96" baseboard | 2500 | 208 | 12.0 | 8530 | 18 |
| 09949 | 06501 | 2F350 | 24" baseboard | 350/262 | 240/208 | 1.5/1.3 | 1195/895 | 5 |
| 09950 | 06502 | 2F500 | 30" baseboard | 500/375 | 240/208 | 2.1/1.8 | 1710/1280 | 6 |
| 09952 | 06508 | 3F750 | 36" baseboard | 750/563 | 240/208 | 3.1/2.7 | 2560/1925 | 7 |
| 09954 | 06509 | 4F1000 | 48" baseboard | 1000/750 | 240/208 | 4.2/3.6 | 3415/2560 | 9 |
| 09955 | 06510 | 5F1250 | 60" baseboard | 1250/937 | 240/208 | 5.2/4.5 | 4265/3200 | 10 |
| 09956 | 06511 | 6F1500 | 72" baseboard | 1500/1125 | 240/208 | 6.3/5.4 | 5120/3840 | 12 |
| 09958 | 06513 | 8F2000 | 96" baseboard | 2000/1500 | 240/208 | 8.3/7.2 | 6825/5120 | 16 |
| 09960 | 06515 | 8F2025 | 96" baseboard | 2500/2000 1875/1500 | 240 208 | 10.4/8.3 9.0/7.2 | 8530/6825 6400/5120 | 18 |
| 03360 | 03358 | 8F2500 | 96" baseboard | 2500/1875 | 240/208 | 10.4/9.0 | 8530/6400 | 18 |



*Add suffix W or A to model to designate color

BASEBOARD ACCESSORIES

| WHITE PART | ALMOND PART | MODEL* | DESCRIPTION | VOLTS | AMPS |
|------------|-------------|--------|----------------------------------------------------------------------------------------------------|-------------|------|
| 03400 | n/a | SBFT2 | Smartbase built-in thermostat kit, electronic programmable, double pole, 40°F to 85°F, retail pack | 240/208 | 12.6 |
| 08734 | 03365 | BTF2 | Built-in thermostat kit, double pole, retail pack, 40°F to 85°F | 240/208/120 | 25 |
| 14925 | 14920 | BTF2 | Built-in thermostat kit, double pole, 40°F to 85°F | 240/208/120 | 25 |
| 08732 | 03366 | BTF1 | Built-in thermostat kit, single pole, retail pack, 40°F to 85°F | 240/208/120 | 25 |
| 14915 | 14910 | BTF1 | Built-in thermostat kit, single pole, 40°F to 85°F | 240/208/120 | 25 |
| 14963 | 14960 | LTF240 | Built-in load transfer switch kit | 240 | |
| 14902 | 14900 | BRF12 | Built-in receptacle plate, requires separate supply wire | 120 | |
| 14932 | 14930 | BTF1TP | Built-in thermostat kit single pole tamper proof, 40°F to 85°F | 240/208/120 | 25 |
| 14942 | 14940 | BTF2TP | Built-in thermostat kit double pole tamper proof, 40°F to 85°F | 240/208/120 | 25 |
| 14971 | 14970 | BLF1 | Corner Connector, inside or outside 90° | | |
| 11030 | MTX | | Mounting tool for baseboard installation | | |

*Add suffix W or A to model to designate color

Model No. Code

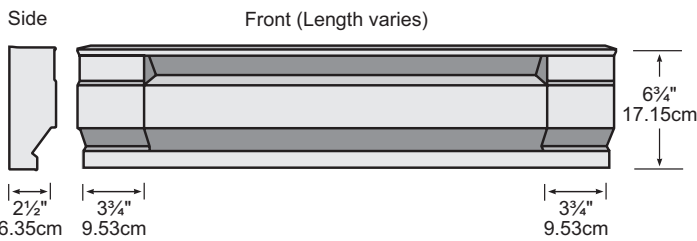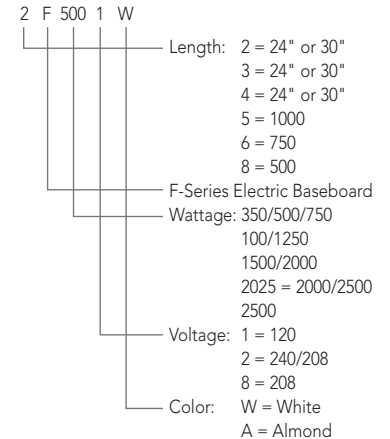

SBFT2W



BTF2W



LTF240A



BRF12W



BLF



MTX