


A24R Pipeline - General Purpose

- Aluminum oxide grain
- Designed and manufactured to perform both cutting and light grinding

METAL Ferrous metals (steel, cast iron, etc.)

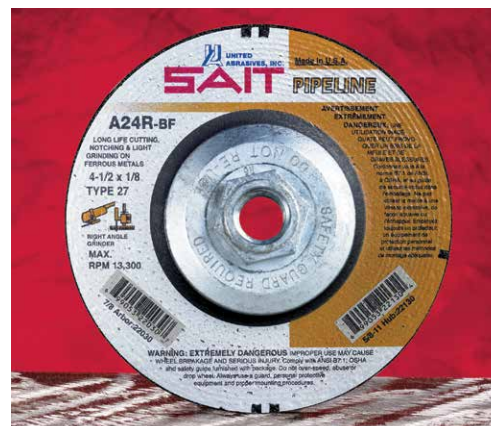


Z24R


- Tough zirconium grain
- High performance cutting and light grinding for the toughest applications

METAL Ferrous metals (iron, steel, welds)

STAINLESS Stainless steel, high tensile alloys



Size			Max RPM	Part Number		Qty Per Box	Qty Per Ctn	Lbs Per Box
A Dia.	B Width	C Bore		Pipeline	Z-tech™			
4	1/8	3/8	13,500	22007	-	25	100	4
4	1/8	5/8	13,500	22015	-	25	100	4
4-1/2	1/8	7/8	13,300	22030	22620	25	100	6
4-1/2	1/8	5/8-11	13,300	22130	22630	10	40	5
5	1/8	7/8	12,200	22040	22622	25	100	7
5	1/8	5/8-11	12,200	22140	22632	10	40	5
6	1/8	7/8	10,200	22042	22623	25	50	10
6	1/8	5/8-11	10,200	22046	22633	10	40	8
7	1/8	7/8	8,500	22055	22624	25	50	15
7	1/8	5/8-11	8,500	22052	22634	10	40	10
9	1/8	7/8	6,600	22065	22626	25	50	25
9	1/8	5/8-11	6,600	22062	22636	10	40	13

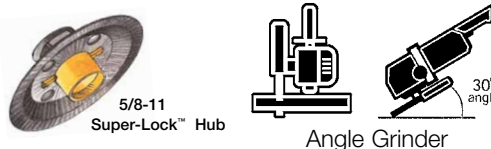

Note: Reusable 5/8-11 adaptor for use on Type 1 and Type 27 reinforced wheels with a 7/8 arbor, a max. diameter of 5" and a wheel thickness of .045 to 1/8" available on page 143 (part #95055).



Also available:
Pipeline Brushes
page 136



- Designed for both cutting and light grinding, eliminating the need for 2 separate wheels
- General purpose formulation provides optimum performance over a wide range of applications
- All sizes reinforced with the highest quality fiberglass for maximum safety and performance
- Our unique Super-Lock™ Hub combines both a mechanical locking system and chemical bond providing one of the safest, vibration-free designs in the industry