




REMOTE CABLE CUTTERS WITH CUT CONFIRMATION

GREENLEE ESG65LXR & ESG105LXR



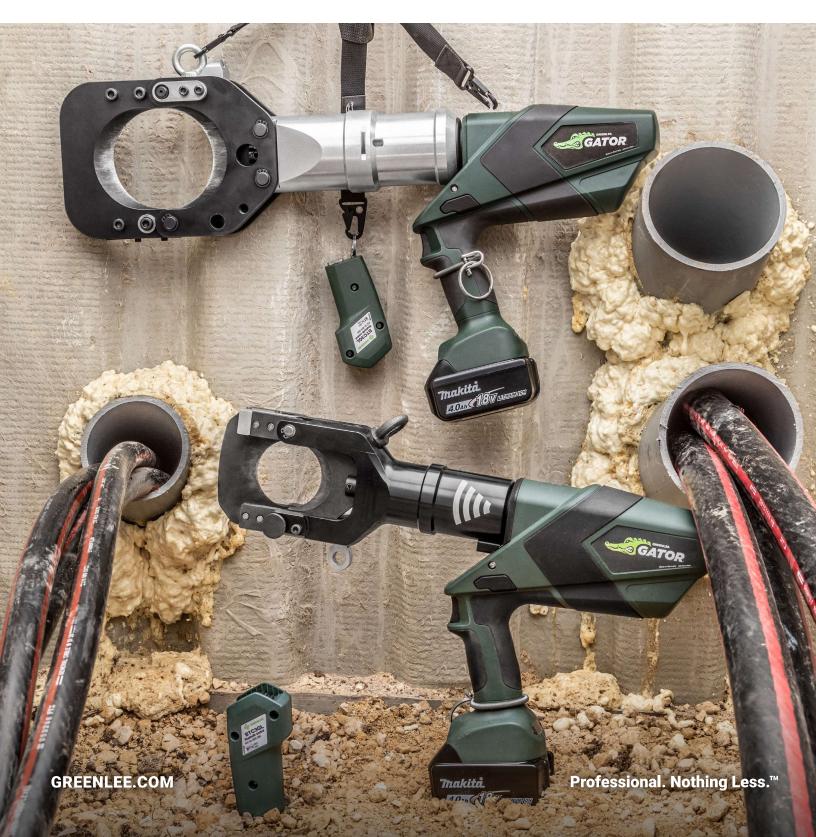

DEDICATED TO PROTECTING YOU

The Greenlee remote cable cutters were developed in unison with utility professionals, creating a method to "remove the target" from the test area when cutting electric cables.

Unlike overhead electric power distribution systems, underground, shielded electric cable systems cannot be visually traced back to an open point to ensure the cable is isolated.







REMOVE THE TARGET. PROTECT THE TARGET.™

"Use of Remote Cutting Tools and the associated processes take the worker out of the Line of Fire."

– Kevin Kinnerk –Retired Standards & Methods Writer





RIGGING SET UP

- · Dual point tie off at head and tool body
- Lifting harness (BTC3-LH)
- Lifting eye bolt (BTC3-LR)



REMOTE CONTROL (BTC3GL)

- Bluetooth connection confirmation LED (BLUE)
- Blade position LED (GREEN)
- Audio feedback





PAIRING THE REMOTE CONTROL

Check out our YouTube page to view the operational videos

REMOTE CABLE CUTTERS WITH

GREENLEE ESG65LXR & ESG105LXR







TOTAL OPERATIONAL CONTROL

- · Select between Hand-Held and Remote usage options
- Double tap trigger operation avoids unintentional blade engagement
- · Mechanical break stops residual blade travel when trigger is disengaged

KEY FEATURES

- · Flip-top jaw and guillotine style cutting head secures conductor
- Cutting capacity up to 2.55" (65 mm) (ESG65LXR) and 4.13" (105 mm) (ESG105LXR)
- · Cutting head rotates 350°
- LED level indicator on battery and built-in tool self-test confirms ability to complete cut

ESG65LXR SPECIFICATIONS

Head Rotation	350°	
Height with Battery	12.5" (318 mm)	
Weight with Battery	13.5" (6.2 kg)	
Battery	18V, 4.0Ah, Li-Ion	
CAPACITY		
Cutter Opening	2.55" (65 mm)	

ESG105LXR SPECIFICATIONS

Head Rotation	350°	
Height with Battery	14.6" (371 mm)	
Weight with Battery	22.3 l b (10.1 kg)	
Battery	18V, 4.0Ah, Li-Ion	
CAPACITY		
Cutter Opening	4.13" (105 mm)	

REMOTE CABLE CUTTERS WITH CUT CONFIRMATION



GREENLEE ESG65LXR & ESG105LXR



2.55" (65 MM) REMOTE CABLE CUTTER

CAT NO.	UPC NO.	DESCRIPTION
ESG65LXR11	783310063247	2.55" (65 mm) Remote Cable Cutter, 120V Charger, Two 4.0Ah Batteries
ESG65LXR12	783310063254	2.55" (65 mm) Remote Cable Cutter, 12V Charger, Two 4.0Ah Batteries
ESG65LXR22	783310063278	2.55" (65 mm) Remote Cable Cutter, 230V Charger, Two 4.0Ah Batteries
ESG65LXRB	783310063285	2.55" (65 mm) Remote Cable Cutter, Bare Tool Only

Kitted configurations include Bluetooth remote control (BTC3GL), 2-point lifting harnes (BTC3-LH), and lifting eye bolt (BTC3-LR)



4.13" (105 MM) REMOTE CABLE CUTTER

CAT NO.	UPC NO.	DESCRIPTION
ESG105LXR11	783310047759	4.13" (105 mm) Remote Cable Cutter, 120V Charger, Two 4.0Ah Batteries
ESG105LXR12	783310047766	4.13" (105 mm) Remote Cable Cutter, 12V Charger, Two 4.0Ah Batteries
ESG105LXR22	783310047773	4.13" (105 mm) Remote Cable Cutter, 230V Charger, Two 4.0Ah Batteries
ESG105LXRB	783310047780	4.13" (105 mm) Remote Cable Cutter, Bare Tool Only

Kitted configurations include Bluetooth remote control (BTC3GL), 2-point lifting harnes (BTC3-LH), and lifting eye bolt (BTC3-LR)



7-YEAR WARRANTY

Greenlee Tools, Inc. warrants to the original purchaser of these goods for use, that these products will be free from defects in workmanship and material for a period of SEVEN years excepting normal wear and abuse.

Warning: Always understand and follow the instructions and warnings for all equipment and material being used to reduce the risk of serious personal injury and product damage.

Do not use in place of reading and understanding the operator's manual. Manuals and instructions are available on Greenlee.com or by contacting Greenlee customer service.

ESG65LXR & ESG105LXR ACCESSORIES

CAT NO.	UPC NO.	DESCRIPTION
BTC3GL	783310047711	Bluetooth Remote Control
BTC3-LH	783310047735	Bluetooth Remote Cutter Lifting Harness
BTC3-LR	783310047728	Bluetooth Remote Cutter Lifting Eye Bolt

Bluetooth is a registered trademark of Bluetooth SIG, Inc. Makita is a registered trademark of MAKITA CORPORATION.





