



## Hart lock industrial grade 20A locking devices

### Product description


4-pole, 4-wire non-grounding  
20A, 3ØY 120/208V/AC  
Non-NEMA



7411C



7413C



7410B



7400N

### Industrial grade plugs & connectors



Rating A	V/AC	Description	Cord diameter	Color	Plug catalog no.	Connector catalog no.		
20	120/208	3ØY safety grip straight body	0.63-1.16" (15.9-29.4mm)	GY	□ 7411C	□ 7413C*	•	•

\*Not NOM cert

### Industrial grade receptacles


Rating A	V/AC	Description	Color	Single receptacle	
20	120/208	3ØY standard industrial	BK	□ 7410B	•

### Industrial grade flanged inlets & outlets

Rating A	V/AC	Description	Color	Flanged inlet	Flanged outlet	
20	120/208	3ØY standard industrial	GY	□ 7408N	□ 7409N	•

### Accessories for non-NEMA 20A locking devices

Description	Catalog no.		
Neoprene weather protective boot for 4-W & 5-W plugs	□ BL1	•	•
Neoprene weather protective boot for 4-W & 5-W connectors	□ BL2	•	•
Diecast aluminum single receptacle cover, vertical mount, for FS/FD boxes	□ 7420	•	•
Glass-filled nylon flanged inlet/outlet cover, vertical mount, for 20A devices	□ WP2	•	•

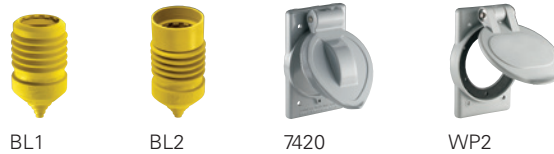

BL1

BL2

7420

WP2

**Dimensional information:**  
C-76-C-78

**Plug & connector specification information:**  
Safety grip non-NEMA 20A: C-84

**Receptacle specification information:**

Non-NEMA 20A: C-87

**Flanged inlet & flanged outlet specification information:**

Non-NEMA 20A: C-89

### Color information:

BK (Black), GY (Gray)

