


Wall Studs



- **Larger capacity:** Redesigned BB38D attaches 1/2" to 1" EMT or flexible conduit to metal or wood studs.
- BB38 attaches MC/AC cable, 1/2" & 3/4" EMT to metal or wood studs.
- Eliminates the need for offset bending of conduit.
- Aligns conduit with standard box knockouts.

Conduit Support

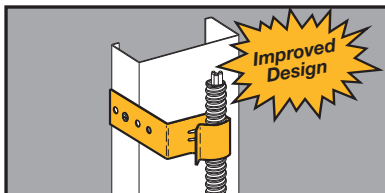


BB38



BB38D

Wall Studs

UPC/Part Number	Catalog Number	Box Depth	Box Qty.
781011 04265	BB38	1 1/2"	100
781011 95244	BB38D	2 1/8"	100

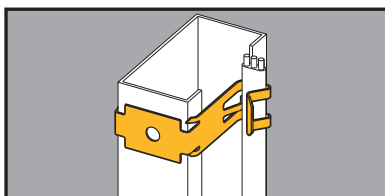

- Secures Romex® sizes 14/2 w/ground thru 12/3 w/ground, MC/AC sizes 14/2 thru 12/3 to metal or wood studs.
- Allows cables to be positioned a minimum of 1 1/4" from face of stud as required by NEC Article 300.4(D).

Flexible Conduit/Cable Fasteners




UPC/Part Number	Catalog Number	Description	Box Qty.
781011 19755	BX5	Secures Flexible Conduit or Cable to Metal or Wood Studs	100

Romex® is a registered trademark used by Southwire® Company, Carrollton, Georgia.

Read safety/installation instruction sheets in packages before use. These products are designed for positioning only. No load rating.

Wall Studs

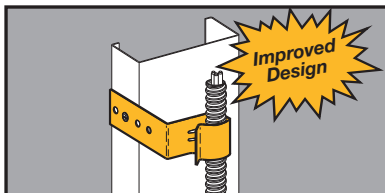

- **Larger capacity:** Redesigned BB38D attaches 1/2" to 1" EMT or flexible conduit to metal or wood studs.
- BB38 attaches MC/AC cable, 1/2" & 3/4" EMT to metal or wood studs.
- Eliminates the need for offset bending of conduit.
- Aligns conduit with standard box knockouts.

Conduit Support




BB38



BB38D

Wall Studs

UPC/Part Number	Catalog Number	Box Depth	Box Qty.
781011 04265	BB38	1 1/2"	100
781011 95244	BB38D	2 1/8"	100

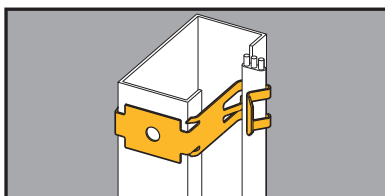

- Secures Romex® sizes 14/2 w/ground thru 12/3 w/ground, MC/AC sizes 14/2 thru 12/3 to metal or wood studs.
- Allows cables to be positioned a minimum of 1 1/4" from face of stud as required by NEC Article 300.4(D).

Flexible Conduit/Cable Fasteners



UPC/Part Number	Catalog Number	Description	Box Qty.
781011 19755	BX5	Secures Flexible Conduit or Cable to Metal or Wood Studs	100

Romex® is a registered trademark used by Southwire® Company, Carrollton, Georgia.

Read safety/installation instruction sheets in packages before use. These products are designed for positioning only. No load rating.